


HOME
easy



HE-205 Remote Bulb Holder

RE-INVENTING THE HOME

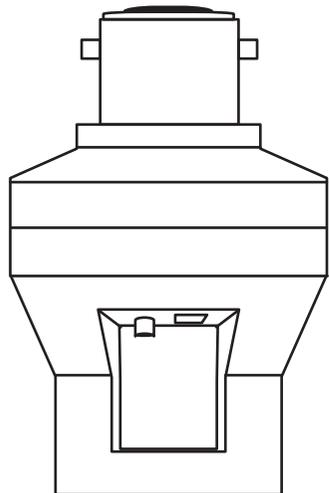


The HE-205 Remote Bulb Holder converts your standard ceiling rose or lamp into a wire free unit.

- Never exceed the product specification 100W Max (Incandescent)
- Range 30 Metres
- Indoor Use Only

Pairing/Deleting with Remote Control:

Up to Six remote controls can be paired with each Bulb holder. To program the bulb holder insert the unit into a compatible ceiling rose or lamp and switch on the power, now press "Learn" button. The LED will start to flash, now press the selected "ON" button on the remote control (additional product), the LED will stop flashing. The units are now paired together, you can test this by pressing the selected "On/Off" button.

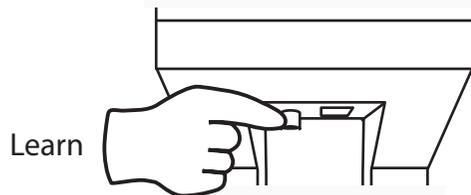

Always refer to the original instruction when using with additional products.

V1.0 Deleting Remote Control:

To delete a remote control that has been paired with a HE-205 Bulb Holder, simply press "Learn" button. The LED will start to blink; press the "Off" button on the remote control, the LED will blink twice to confirm that the remote control has been removed from the Bulb Holders memory.

Remote Socket reset:

To delete all the remote control units from the memory of the Bulb Holder, hold the "Learn" button for more than 6 seconds, the LED will start to blink continuously. Press and hold the learn button again, the LED will blink twice to confirm that all paired remote controls are deleted from the receiver memory.

Dimming Receiver Sockets :

1. Using a paired remote control, Press the "On" button and press "On" again. The unit will start the dimming cycle.
Never exceed 100W maximum load.
2. To set the receiver socket at the required level, press the "On" Button. press "Off" to switch the receiver off.

Product Specification:

Receiver Module: HE-205
Input: 230V ~50Hz
Range: 30 Metres (Open Distance)
Max Load: 100W (Incandescent)
Frequency: 433.92MHz
Indoor Use Only

Warning: Never Exceed the Product Specification

Contact:

C H Byron
34, Sherwood Rd
Aston Fields
Bromsgrove
B60 3DR

Helpline: 0845 2301 231

Tel: 0845 2301231
Fax: 01527 557701
Web: www.chbyron.com
E-mail: support@chbyron.com

Byron		433MHz	
R&TTE APPROVED		CE 0560	
A	IRL	UK	M
B	L	BG	N
DK	NL	CZ	SK
FIN	PL	EST	SLO
F	P	H	CH
D	E	IS	PI
GR	S	LV	RO
LT			

CH Byron Electrical United Kingdom. www.chbyron.com